




Features :


1. Sourced by high output OSRAM SMD2835 LED, Good color conformity and no spot.
2. 99.99% gold thread, pure copper bracket coated with silver.
3. Constant current driving technology guarantees stable performance of product.
4. Overmoulded: anti-dusting, anti-moisture, waterproof, anti-shock.
5. 20 pcs Max. in a series connection.
6. CE, ROHS and UL certified.

Items	Parameters
Model No.	HOLM-1.5
CCT (K)	7000K
Beaming Anger (°)	160
Luminous Flux (lm)	150
CRI (Ra)	≥80
Voltage (V)	DC12V
Power (W)	1.5W
Driving Method	Inner Constant Current
Dimension (mm)	87*17.5*7.2
Weight (g)	11.5
Working Tem. (°C)	-25~+60
Storage Tem. (°C)	-25~+70
Protection Grade	IP65


Outter Size(mm) :

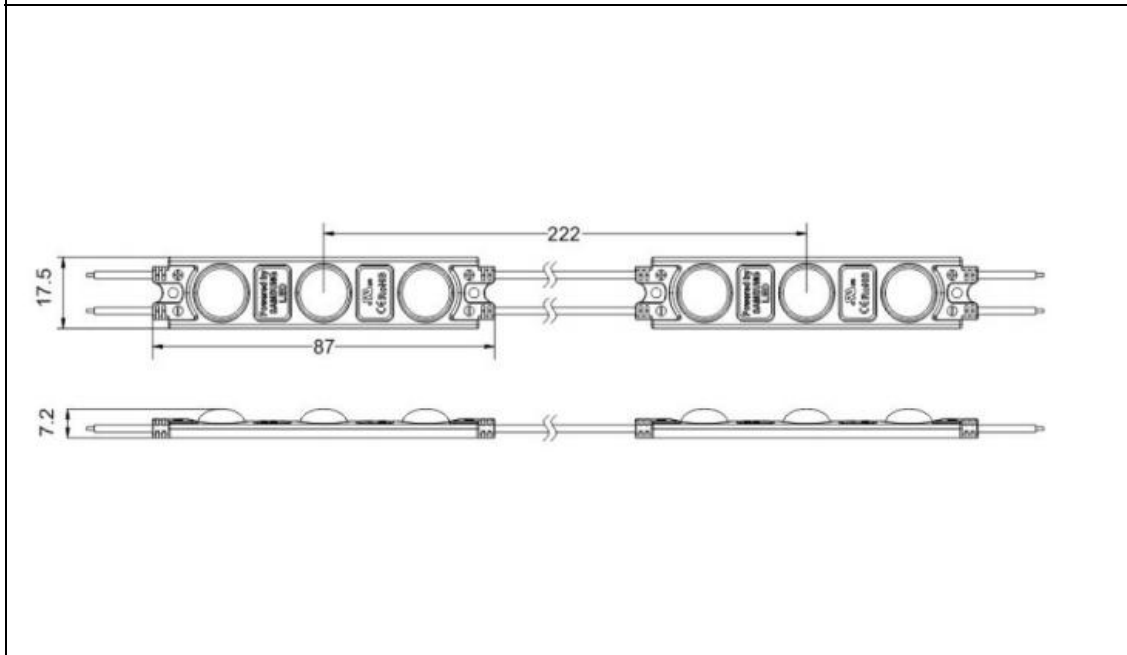

Wire Connection :

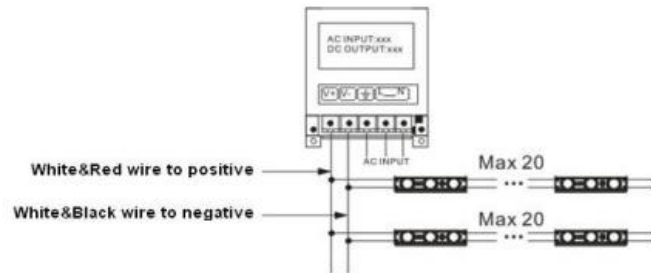

Packaging Specification(mm) :

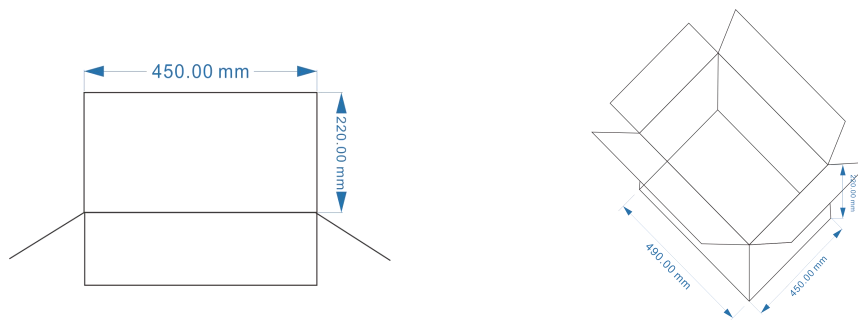

1. Carton size : 490*450*220mm ;
2. Total: 1000pcs/CTN
3. N.W.: 14Kg(1±10%)

Warmly Reminder

1. Disassembling or modifying the product is forbidden.
2. Installation with power on is forbidden.
3. Any organic solvent chemical is forbidden.
4. Acidic or alkaline adhesive is forbidden when install, neutral glass cement could be used for installation purpose, make it drying in open environment for four hours.
5. Isolation and corrosion prevention on all wiring points and wire ends.
6. Make sure the power wire is thick enough and ensure the voltage and connections are connected correctly before power on.
7. This product should be used in a sign, do not expose it in opening site.
8. The power wire between power supply and module should be less than two meters to keep the same brightness on all parts.