

HYUNDAI


LED Bulb

Technical Specification

Fixture Product Specification

Product Description:	13W LED Bulb 6500K
----------------------	--------------------

A、 Appearance Description

	Component NO	Component Name	Material Technics	Color Effect	Remark
	1	bulb	PC	white	
	2	Heat sink	AL 1060		
	3	Housing	PBT + AL 1060	white	
	4	base	Nickel + PBT		

B、 Structure

Parameter	Units	Min	Rating	Max	Remark
diffuser					PC
Driver			internal		
Installation Method	Rotating Mounting				
length	Mm	114	116	118	
Height	Mm	59	60	61	
Weight	g	45	50	55	

C、 Product Certification

Standards	<input checked="" type="checkbox"/> IEC 60598 Series <input checked="" type="checkbox"/> SASO2870 <input type="checkbox"/> LVD <input type="checkbox"/> IEC 61347 Series <input type="checkbox"/> GB19510 <input type="checkbox"/> IEC62031 <input type="checkbox"/> FCC 47 part15 <input type="checkbox"/> GB/T20145 <input type="checkbox"/> IEC 62471 <input type="checkbox"/> CISPR15 <input type="checkbox"/> ROHS <input type="checkbox"/> IEC 61000- 3- 2/ 3 <input type="checkbox"/> IEC 61547
-----------	--

D、Electronic Data

Parameter	Units	Min	Rating	Max	Remark
Supply Voltage	V	110	110-240	240	
Supply Frequency	Hz	50	50/60	60	
Supply Current	A	0.095	0.105	0.115	
Power Consumption	W	11.7	13	14.2	
Power Factor	-	>0.5			
LED Driver Lifetime			25000hrs		

E、Light Source Data

LED Specifications	Units	
LED Qty. (pcs)	pcs	18
LED Size	mm	28*35
LM80 Report		Y

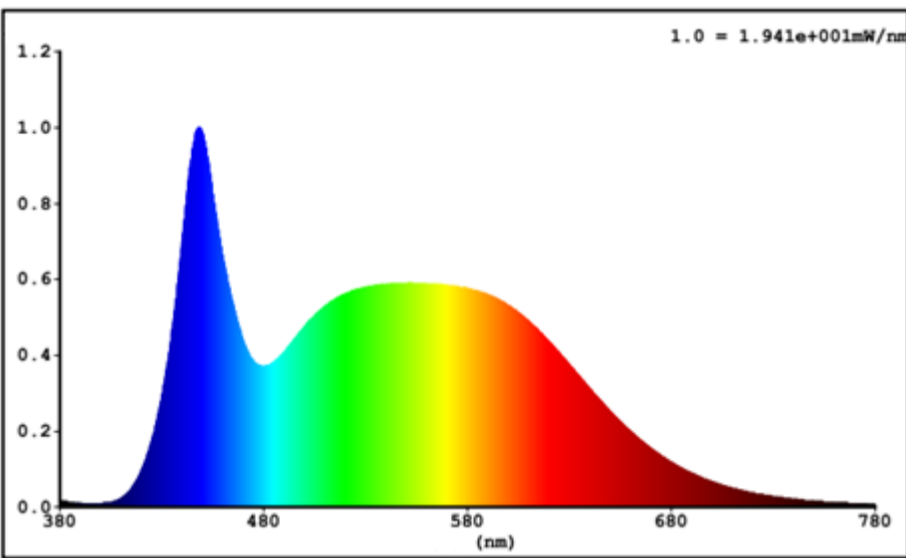
F、Optical Data

Parameter	Units	Min	Rating	Max	Remark
Luminous Flux	Lm	1080	1200		
Beam Angle	°	120			
Luminous Efficacy	lm/W	85	90		
Ra	-	80			
Chromaticity Coordinate		<input checked="" type="checkbox"/> CIE standard <input type="checkbox"/> ANSI standard <input type="checkbox"/> JIS standard			
Color Temperature	K		6500K		
SDCM			SDCM ≤7		
Optical Efficiency			>93%		

G、Reliability Data

Parameter	Units	Rating/Working Condition	Remark
Life	h	25000H	
Number of Switching Cycles	Times	12500	
Starting Time	s	1	

H、Spectroscopic Data

Parameter	Data	RA=82.3
R1	83	
R2	89	
R3	93	
R4	85	
R5	84	
R6	86	
R7	89	
R8	72	
R9	14	
R10	74	
R11	85	
R12	69	
R13	84	
R14	96	
R15	78	

I、CIE Color Data

Parameter	Rating/Working Condition	Remark
Chromaticity Coordinate	$x = 0.3165$ $y = 0.3374$ / $u' = 0.1973$ $v' = 0.4733$ ($Duv=5.59e-03$)	
Dominate Wavelength	$\lambda_d=494.8nm$ Color Purity=5.5%	
Peak Wavelength	$\lambda_p=448nm$	
FWHM	30.6nm	
Color index	R=13.8% G=80.4% B=5.8%	