

---


# HYUNDAI

LED Downlight, 20W  
Technical Specification

**Fixture Product Specification**

Product Description:	
----------------------	--

**A、 Appearance Description**

	Component No.	Component Name.	Material Technics	Color Effect	Remark
	1	Crust	PBT	white	Normal
	2	optical lens	PC	dull polish lucency	
	3	Drive shell	PC	white	
	4	Heat dissipating aluminum parts	1060	True qualities	
	5	Back cover	PBT	white	
	6	Spring	Fe	silver	
	7	Spring rubber sleeve	Silica gel	white	
8	Press cover	PC	orange		

**B、 Structure**

Parameter	Units	Min	Rating	Max	Remark
<b>Weight</b>	<b>g</b>	<b>378</b>	<b>420</b>	<b>462</b>	
<b>Diffuser</b>	-	<b>Opel diffuser / PC</b>			
<b>Driver</b>	-	<b>Built in</b>			
<b>Installation Method</b>	Recessed				

**C、 Product Certificate**

<b>Standards</b>	<input checked="" type="checkbox"/> IEC 60598 Series <input type="checkbox"/> UL1598 <input type="checkbox"/> GB7000 Series <input type="checkbox"/> IEC 61347 Series <input type="checkbox"/> UL1310 <input type="checkbox"/> GB19510 <input type="checkbox"/> IEC62031 <input type="checkbox"/> FCC 47 part 15 <input checked="" type="checkbox"/> LVD <input type="checkbox"/> IEC 62471 <input type="checkbox"/> CISPR15 <input checked="" type="checkbox"/> ROHS <input type="checkbox"/> IEC 61000- 3- 2/ 3 <input checked="" type="checkbox"/> EMC
------------------	---

**D、 Electronic Data**

Parameter	Units	Min	Rating	Max	Remark
Supply Voltage	V	<b>100</b>	<b>110 - 220</b>	<b>240</b>	
Supply Frequency	Hz	<b>50</b>	<b>50/60</b>	<b>60</b>	
Supply Current	mA	<b>82.8</b>		<b>182.6</b>	
Power Consumption	W	<b>18</b>	<b>20W</b>	<b>22</b>	
Power Factor	-	<b>0.9</b>			
Operating Temp.	C°		<b>-20 ~ 45</b>		
THD	%	<b>≤20</b>			

## Fixture Product Specification

Parameter	Units	Min	Rating	Max	Remark
LED Driver Current	mA	<b>237.6</b>		<b>290.4</b>	
LED Driver Voltage	V	<b>63</b>		<b>77</b>	
LED Driver Efficiency	%	<b>85</b>			


### E、 Light Source Data

LED Model	-	<b>LED_2835_9V100mA_SL-WB2835FTA-31KAG/G-R80</b>			
LED Qty. (pcs)	<b>pcs</b>	<b>40</b>			
LED Circuit Mode		<b>72V</b>			
LM80 Report	-	<b>Y</b>			

### F、 Chromaticity Data

Parameter	Units	Min	Rating	Max	Remark
Luminous Flux	Lm	<b>1710</b>	<b>1900</b>	<b>2050</b>	
Max Luminous Intensity	Cd				
Beam Angle	°		<b>102</b>		
Luminous Efficacy	lm/W	<b>85.5</b>	<b>95</b>	<b>102.5</b>	
CRI	-	<b>80</b>			
Chromaticity Coordinate		<input type="checkbox"/> CIE standard <input type="checkbox"/> ANSI standard <input type="checkbox"/> JIS standard			
Color Temperature	K	<b>3000K / 4000K / 6500K</b>			

Light Distribution Curve  
Average Beam Angle(50%):  
102.1°

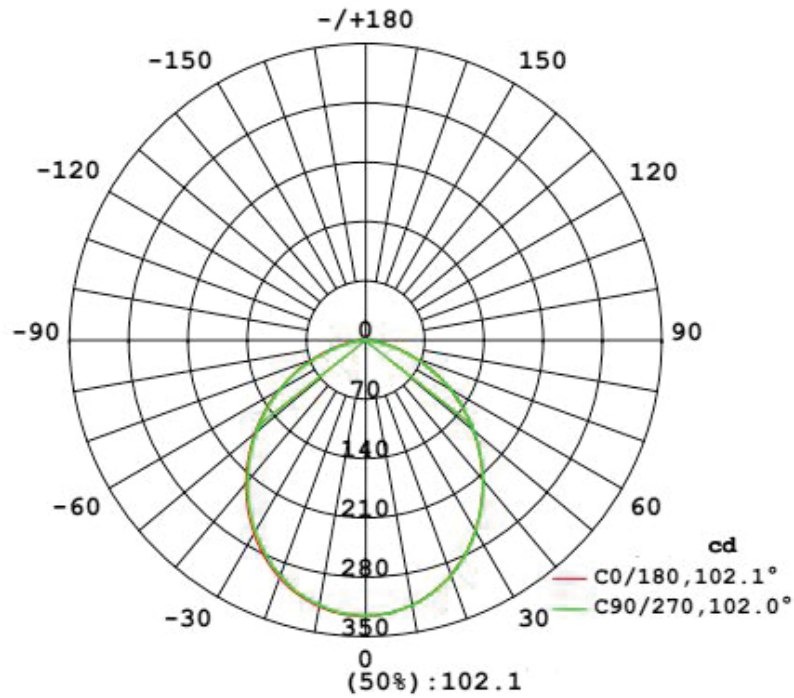

**G、Reliability Data**

<b>Parameter</b>	<b>Units</b>	<b>Rating/Working Condition</b>	<b>Remark</b>
Lifetime	Hrs.	<b>30000h</b>	
Number of Switching Cycles	Times	<b>15000</b>	
Starting Time	s	<b>0.9</b>	
Ability Test	-	<b>PASS</b>	
High-low Temperature Cycle Test	-	<b>PASS</b>	
High Temperature and Humidity Test	-	<b>PASS</b>	